


## Max Universal / F-Quality

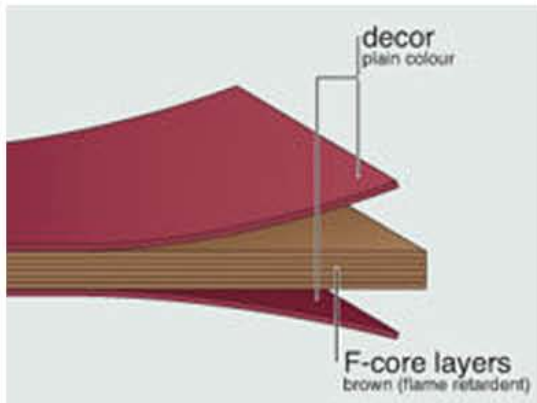

## Detalles

### Formats:

2140 x 1060 mm = 2.27 m<sup>2</sup>  
2800 x 1300 mm = 3.64 m<sup>2</sup>  
4100 x 1300 mm = 5.33 m<sup>2</sup>  
2800 x 1850 mm = 5.18 m<sup>2</sup>  
4100 x 1850 mm = 7.59 m<sup>2</sup>

Tolerances: +10 - 0 mm

The panels are manufactured sizes. In case of dimensional accuracy and angle accuracy we advise an all-sided blank.

**Surface finish:** FH

**Core:** F grade; colour brown

### Thicknesses:

Panels with reverse side sanded: for sandwich elements with a symmetrical structure.  
2.0 to 4.0 mm.  
(format 4100 x 1850 mm on request only)

Panels with two-sided decor:  
4.0 to 15.0 mm

### Thickness tolerances:

2.0 - 2.9 mm ± 0.2 mm  
3.0 - 4.9 mm ± 0.3 mm  
5.0 - 7.9 mm ± 0.4 mm  
8.0 - 11.9 mm ± 0.5 mm  
12.0 - 15.0 mm ± 0.6 mm